


# High Pressure Cleaner

## HDE840-F

Food progressing  
Hot water resistant

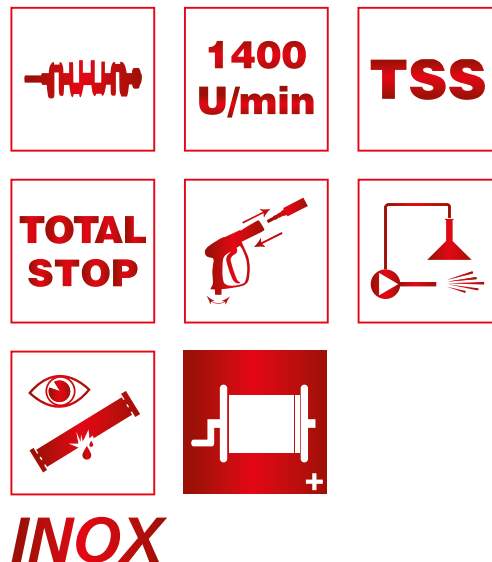

Type	HDE840-F 24kW Standard		HDE840-F 24kW Premium
Voltage	3/PE/AC/50Hz/400V	<ul style="list-style-type: none"> <li>Etronic I - Controls</li> </ul>	<ul style="list-style-type: none"> <li>Etronic I - Controls</li> </ul>
Operating pressure	30-140bar/3-14MPa	<ul style="list-style-type: none"> <li>10m HP-Hose DN08 - 315bar blue</li> </ul>	<ul style="list-style-type: none"> <li>Hose-Reel</li> </ul>
Max. pressure	160bar/16MPa	<ul style="list-style-type: none"> <li>Trigger-Gun with swivel</li> </ul>	<ul style="list-style-type: none"> <li>20m HP-Hose DN08 - 315bar blue</li> </ul>
Discharge capacity	300-720l/h	<ul style="list-style-type: none"> <li>Double Spray-Lance 900mm c/w</li> </ul>	<ul style="list-style-type: none"> <li>Trigger-Gun with swivel</li> </ul>
Nozzle size	045	<ul style="list-style-type: none"> <li>Nozzle-Protection</li> </ul>	<ul style="list-style-type: none"> <li>Double Spray-Lance 900mm c/w</li> </ul>
Heating capacity	24kW	<ul style="list-style-type: none"> <li>Stainless-Steel Jet-Nozzle 25°</li> </ul>	<ul style="list-style-type: none"> <li>Nozzle-Protection</li> </ul>
Hot water capacity	30-80°C	<ul style="list-style-type: none"> <li>Water-Supply separation acc. water reg.</li> </ul>	<ul style="list-style-type: none"> <li>Stainless-Steel Jet-Nozzle 25°</li> </ul>
Pump speed	1400rpm	<ul style="list-style-type: none"> <li>Chemical supply in high-pressure Jet c/w</li> </ul>	<ul style="list-style-type: none"> <li>Spray-Lance 900mm c/w Rotary-Nozzle</li> </ul>
Connected load	28,8kW/44A	<ul style="list-style-type: none"> <li>Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>Water-Supply separation acc.</li> </ul>
Electrical protection	3x50A slow		<ul style="list-style-type: none"> <li>DIN EN 1717 class 4</li> </ul>
Weight net/with package		124kg/145kg	133kg/154kg
Dimensions device/with package (LxWxH)		107x73,5x102cm/119x88x127cm	107x73,5x102cm/119x88x127cm

Food progressing with abrasion resistant high pressure hose blue, self-supporting, robust, corrossions free, rotation-moulded device- chassis for food industry, stainless steel, impact-resistant device-cover made of ABS, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation. Triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic I - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar stainless steel.

Art.No.	108003	108004
---------	--------	--------