


High Pressure Cleaner

KD523

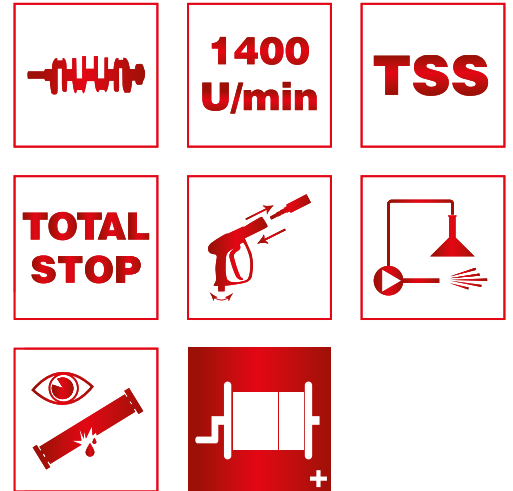

Type	KD523-Standard		KD523-Premium
Voltage	1/N/PE/AC/50Hz/230V	<ul style="list-style-type: none"> 10m HP-Hose DN06 - 250bar Trigger-Gun with swivel Spray-Lance 700mm c/w Vario-Nozzle Stainless-Steel Jet-Nozzle 25° Detergent-Supply c/w Low-Pressure Injector and Metering-valve 	<ul style="list-style-type: none"> Hose-Reel 15m HP-Hose DN06 - 250bar Trigger-Gun with swivel Spray-Lance 700mm c/w Vario-Nozzle Stainless-Steel Jet-Nozzle 25° Spray-Lance 900mm c/w Rotary-Nozzle Detergent-Supply c/w Low-Pressure Injector and Metering-valve
Operating pressure	30-140bar/3-14MPa		
Max. pressure	160bar/16MPa		
Discharge capacity	300-600l/h		
Nozzle size	043		
Max. Inlet temperature	45°C		
Pump speed	2800rpm		
Connected load	2,9kW/12,5A		
Electrical protection	16A slow		
Weight net/with package		37kg/41kg	44kg/48kg
Dimensions device/with package (LxWxH)		60x40x86cm/66x42x96cm	60x40x86cm/66x42x96cm

Self-supporting, robust, rotation-moulded device-chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain with rubber stand, storage possibility for all accessories, robust rotary on-off switch, 5,0m connection cable.

Art.No.	559001	559002
---------	--------	--------